


# CAT 6 FTP 24-PORT PATCH PANEL

PNG24-SC6

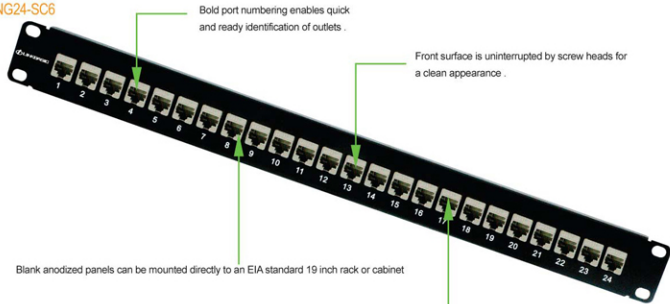

Bold port numbering enables quick and ready identification of outlets.

Front surface is uninterrupted by screw heads for a clean appearance.

Blank anodized panels can be mounted directly to an EIA standard 19 inch rack or cabinet

Feature universal wiring for both T 568A and T 568B and voice application.


## Products Description

The shielded patch panels are loaded with shielded keystone jacks, which are housed in a closure full shielding metal enclosure designed to meet highest industry requirement. A shielded version is also available to maximum protection from EMIRFI interference. By utilizing fully shielded jacks and connecting hardware, you can reduce the effects of interference on the network data transmissions.

## Features and benefits

- Design to mount to any standard 19" rack or cabinet
- 24-port Cat 6 shielded Patch panel
- Space saving, high-density 1U
- Black Electrostatic Powder-Coated Steel: phosphor bronze with tin plating over nickel. Meet or exceed the requirement of ANSI /TIA/EIA 568B 2
- Use keystone jacks and keystone inserts to configure your panel to accommodate a variety of schemes
- Sturdy Aluminum Plate around RJ 45 Jacks
- Phosphor bronze with 6-50 micro inches gold plated
- Available with T568 A, T568 B wiring pattern and meeting the requirement of Cat 6 standard
- Color Coded TIA/EIA 568A (international) and 568B (AT&T Standard) Wiring For Easy Installation
- Termination accepts 22,24 26 AWG (0.64, 0.5 and 0.4) solid wires
- Metal sheet, Corrosion resistant steel
- Plastic: fire self-extinguish high impact plastic

## Install instructions



The bracket of Cat 6 patch panel.



Position the shielded keystone jack for installation.



Insert the jack into the mounting location properly.

# CAT 6 FTP 24-PORT PATCH PANEL



PNG24-SC6


## Cat 6 FTP 24-port patch panel



PNS24-SC6

## Cat 6 FTP 24-port patch panel

The patch panel is a 19 inch rack mountable RJ45 jack panels , Each panel has cutouts that accept virtually all snap-in jacks , the kits includes the new icon labels with plastic holders that you mount on the front of the panel for easy port identification .Blank anodized panels can be mounted directly to an EIA standard 19 inch relay back or cabinets .



PNG24-SKJ

## Cat 6 FTP 24-port empty panel

### Order Information

Part number	Description	Inner box	Carton	Carton measurement	Carton weight
PNG24-SC6	Cat 6 FTP 24-port patch panel	1PC	5PCS	L 53.5cm× W 31.3cm × H 23.4cm	10.5KG
PNS24-SC6	Cat 6 FTP 24-port patch panel	1PC	5PCS	L 53.5cm× W 31.3cm × H 23.4cm	18.5KG
PNG24-SKJ	Cat 6 FTP 24-port empty panel	1PC	5PCS	L 53.5cm× W 31.3cm × H 23.4cm	6.5KG